
**Product Guide** 

## **CONTENTS**

## STEM SHADE HARDWARE

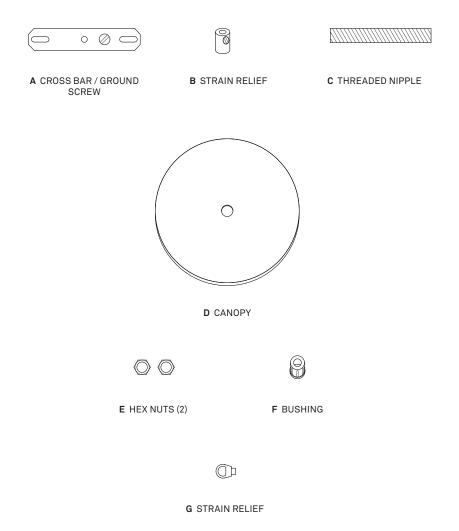


## **INSTALLATION NOTE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

## **INSTRUCTIONS**

- 1 Install cross bar (A) to junction box.
- 2 Thread lamp cord through strain relief (B), threaded nipple (C) and canopy (D) as shown in diagram.
- 3 Slip lamp cord through center hole of cross bar and secure threaded nipple in center hole. Leave enough threading exposed on canopy side for strain relief to thread.
- 4 Thread two hex nuts (E), bushing (F) and strain relief (G) on to lamp cord.
- 5 Secure hex nuts and bushing to nipple.
- Find desired drop height of stem light and tighten set screw of strain relief (G) against lamp cord.

  Make sure to have a secure fit.
- 7 Make necessary electrical connections in junction box. Connect white (neutral) and black (hot) leads accordingly. Tie a standard electrician's knot.
- 8 Raise canopy against ceiling and secure strain relief against canopy.
- 9 You are done; enjoy!

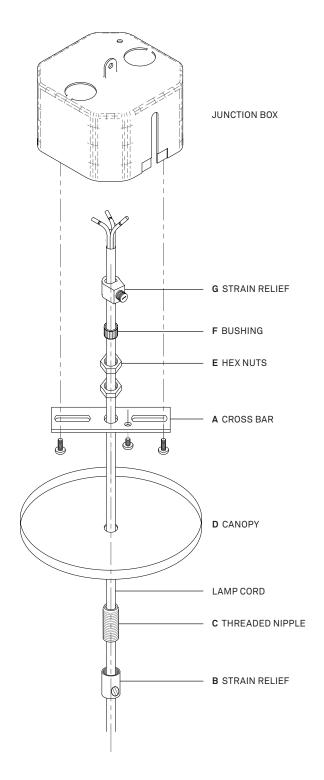

## **CHANDELIER CARE**

#### ON CLEANING

Regular cleaning is essential to prevent dust from building up on the fixture. We recommend wearing the included cotton gloves when cleaning and handling.

First, make sure that the fixture is switched off and cool. For general everyday cleaning, use a soft antistatic dust brush or similar.

For cleaning stubborn layers of dust, use a gentle solvent free cleanser with paper towels or a micro fiber cloth. Solvent based cleansers may damage the fixture's finishes and/or leather color.

## **GENERAL NOTE**

The suspension canopy systems should not be exposed to water or wind, or be allowed to oscillate continuously in any circumstance. Avoid placing fixtures close to HVAC vents or in chemical-laden environments such as indoor swimming pools.

#### **REPLACEMENTS**

Replacement light bulbs are available directly from our online shop.

#### WARRANTY

PELLE warrants its products to be free of defects in workmanship under normal use and service for a period of one year from date of purchase. PELLE reserves the right to inspect the damaged product before having any obligation under this limited warranty. All costs of shipping for inspection are the sole responsibility of the purchaser. PELLE, at it's option, shall repair or replace the defective unit covered by this warranty. PELLE is not responsible for damages caused by improper installation, maintenance or operation. Removing warning labels from the fixture or any other modification to the fixture not performed by manufacturer voids the warranty. Our warranty extends to products purchased only by the original purchaser.